

可扭矩形软波导·Flexible Twist Rectangular Waveguide



WR-90 Flexible Twist Rectangular Waveguide
with CPR90G Flanges from 8.2 - 12.5 GHz

FTR100-S-1200-CPRG/CPRG

电性能 Electrical Specifications

描述 Description	参数 Data
频率 Frequency Range (GHz)	8.2-12.5
电压驻波比 VSWR	1.13
插入损耗 Insertion Loss (dB/m)	0.43
平均功率 Average Power(kw)	1


机械性能 Mechanical Specifications

E 面最小弯曲半径 Min Bend Radius, E plane (mm)	64
H 面最小弯曲半径 Min Bend Radius, H plane(mm)	127
E 面重复弯曲半径 Repeated Bend Radius, E plane(mm)	264
H 面重复弯曲半径 Repeated Bend Radius, H plane(mm)	528
最大扭转角度 Max Twist Angle(deg/m)	310
气密性 Pressurization (psi)	10
组件长度 Length(mm)	1200
工作温度 Operation Temperature	-40°C ~ 75°C
储存温度 Storage Temperature	-55°C ~ 85°C

通用性能 General Specifications

描述 Description	法兰 1 Flange1	波导 Waveguide	法兰 2 Flange2
接口 Interface	CPR90G	BJ100/WR90/WG16/R100	CPR90G
材料 Material	黄铜 Brass		
护套 Sheath	硅橡胶 Silicon Rubber		

图纸 Drawing

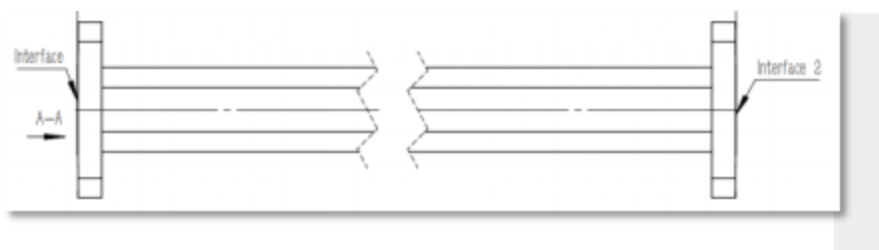

规格认证 Compliance Certification

ISO 9001 : 2015